

Hospital Grade Silencers

Rectangular Shape with 2" Insulation (39-46 dBA). Model NTH02-R

Nett Technologies' Hospital Grade Silencers are designed to achieve maximum performance with the least amount of backpressure.

These reactive/absorptive silencers are used for reciprocating or positive displacement engines where noise level regulations are high.

FEATURES & BENEFITS

- Over 25 years of excellence in manufacturing noise and emission control solutions
- Compact modular designs providing ease of installations, less weight and less foot-print
- Responsive lead time for both standard and custom designs to meet your needs
- Customized engineered system solutions to meet challenging integration and engine requirements


OPTIONS

- Versatile connections including ANSI pattern flanges, NPT, slip-on, engine flange, schedule 40 and others
- Aluminized Steel, Stainless Steel 304 or 316 construction
- Two inlet configuration is available upon request

ACCESSORIES

- Hardware Kits
- Flexible connectors and expansion joints
- Elbows
- Thimbles
- Raincaps
- Thermal insulation: integrated or with thermal insulation blankets


TYPICAL ATTENUATION CURVE

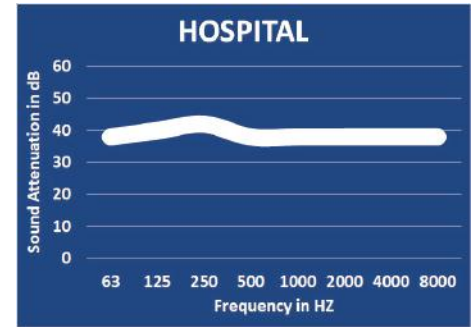


Please see our accessories catalog for a complete listing.

Contact Nett Technologies with your projects design requirements and specifications for optimized noise control solutions.


TYPICAL CONFIGURATIONS

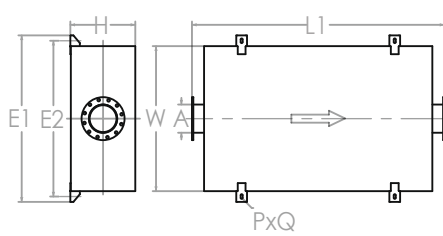

END IN END OUT (EI-EO)

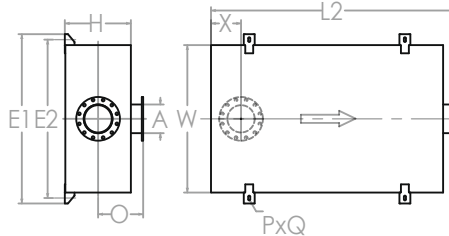

BOTTOM IN END OUT (BI-EO)

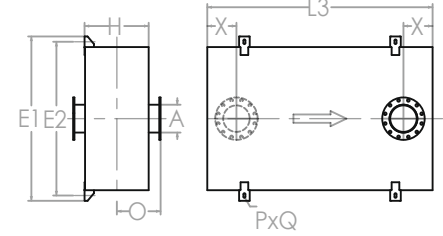

BOTTOM IN TOP OUT (BI-TO)

PRODUCT DIMENSIONS (in)

Model*	A	W	H	L1	L2	L3	O	X**	X	E1	E2	P	Q
	Outlet	Width	Height	EI-EO	BI-EO	BI-TO		Min	Max			Slot Dia	Slot L
NTHO-T2-R4	4	34	10	36	32	28	9	4.5	13	41	37	0.75	1.75
NTHO-T2-R5	5	36	12	40	36	32	10	5	15	43	39	0.75	1.75
NTHO-T2-R6	6	38	12	42	38	34	10	5.5	16	45	41	0.75	1.75
NTHO-T2-R8	8	52	14	54	50	46	11	6.5	22	60	56	1	2
NTHO-T2-R10	10	58	16	62	58	54	12	7.5	26	66	62	1	2
NTHO-T2-R12	12	64	20	68	64	60	14	8.5	29	72	68	1	2
NTHO-T2-R14	14	70	24	76	72	68	16	9.5	33	78	74	1	2
NTHO-T2-R16	16	76	26	84	80	76	17	10.5	37	84	80	1	2
NTHO-T2-R18	18	86	28	88	84	80	18	11.5	39	96	90.75	1.25	2.25
NTHO-T2-R20	20	92	30	96	92	88	19	12.5	43	102	96.75	1.25	2.25
NTHO-T2-R22	22	94	32	98	94	90	20	13.5	44	104	98.75	1.25	2.25
NTHO-T2-R24	24	96	34	100	96	92	21	14.5	45	106	100.75	1.25	2.25

* This 2" internally insulated model provides a great reduction in the outer surface temperature. Other models and custom designs are available upon request. Dimensions subject to change without notice. All silencers are equipped with drain ports on inlet side. The silencer is all welded construction and coated with high heat black paint for maximum durability.

** Standard inlet/outlet position.